

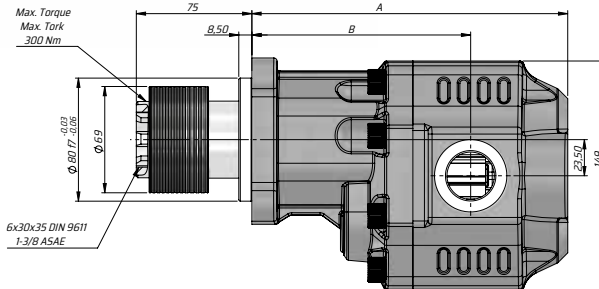


## 4 DELİKLİ TRC ÇİFT YÖNLÜ DİŞLİ POMPA


 HİDROLİK SEMBOL  
 HYDRAULIC SYMBOL


|                                                   |                                                                                |                                      |        |       |      |
|---------------------------------------------------|--------------------------------------------------------------------------------|--------------------------------------|--------|-------|------|
| Fluid                                             | Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon |                                      |        |       |      |
| Kinematic viscosity suggested                     | Average ambient temp. (°C)                                                     | < -10                                | -10-10 | 10-35 | > 35 |
|                                                   | VG (cSt = mm <sup>2</sup> /s)                                                  | 22                                   | 32     | 46    | 68   |
| Optimale kinematic viscosity                      |                                                                                | VG= 10 cSt - 100 cSt                 |        |       |      |
| Max kinematic viscosity suggested at the start-up |                                                                                | VG= 750 cSt                          |        |       |      |
| Viscosity index suggested                         | VI > 100                                                                       | Working temperature -15°C +100°C     |        |       |      |
| Oil filtering                                     |                                                                                | > 200 bar: 10 µm<br>< 200 bar: 25 µm |        |       |      |
| Inlet pressure                                    |                                                                                | -0,3 - 2 bar                         |        |       |      |



| Kod<br>Code | İletim hacmi<br>Displacement | Max. Sürekli<br>Basıncı<br>Max. Continuous<br>pressure | Maks. Aralıklı<br>Basıncı<br>Max. Intermittent<br>Pressure | Maks. Anlık Basıncı<br>Max. Peak Pressure | Maks. Sürekli<br>Hız<br>Max. Continuous<br>Speed | Maks. Aralıklı<br>Hız<br>Max. Intermit-<br>tent Speed | Min.<br>Hız Min.<br>Speed | A    | B     | Giriş<br>Inlet | Çıkış<br>Outlet |
|-------------|------------------------------|--------------------------------------------------------|------------------------------------------------------------|-------------------------------------------|--------------------------------------------------|-------------------------------------------------------|---------------------------|------|-------|----------------|-----------------|
| BD          | (cm³/rev)                    | (100%)(BAR)                                            | (20 sec.max)(BAR)                                          | (6 sec.max)(BAR)                          | (RPM)                                            | (RPM)                                                 | (RPM)                     | (mm) | (mm)  | Ç              | Ç               |
| G300345F335 | 34                           | 240                                                    | 250                                                        | 260                                       | 2200                                             | 2800                                                  | 300                       | 186  | 130.5 | G3/4"          |                 |
| G300435F335 | 43                           | 230                                                    | 240                                                        | 250                                       | 2000                                             | 2500                                                  |                           | 192  | 135.5 |                |                 |
| G300515F335 | 51                           | 220                                                    | 230                                                        | 240                                       |                                                  |                                                       |                           | 197  | 135.5 |                |                 |
| G300615F335 | 61                           | 205                                                    | 225                                                        | 230                                       | 1900                                             | 2500                                                  |                           | 205  | 142   | G1"            |                 |
| G300735F335 | 73                           | 170                                                    | 180                                                        | 190                                       | 1500                                             | 1800                                                  |                           | 210  | 144   |                |                 |
| G300825F335 | 82                           | 205                                                    | 225                                                        | 230                                       | 1900                                             | 2500                                                  |                           | 216  | 146   |                |                 |