




4 HOLES ISO BI-DIRECTIONAL GEAR PUMP
4 DELİKLİ ISO ÇİFT YÖNLÜ DİŞLİ POMPA

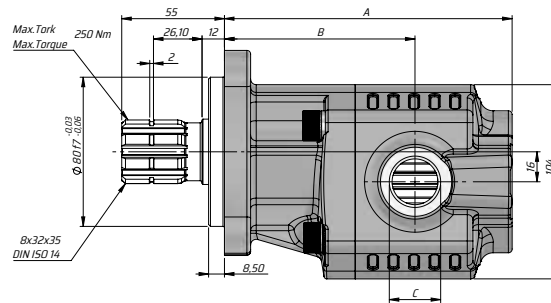

HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35	> 35
	VG (cSt = mm²/s)	22	32	46	68
Optimale kinematic viscosity			VG= 10 cSt - 100 cSt		
Max kinematic viscosity suggested at the start-up			VG= 750 cSt		
Viscosity index suggested	VI > 100	Working temperature		-15°C - +100°C	
Oil filtering			> 200 bar: 10 µm < 200 bar: 25 µm		
Inlet pressure			-0,3 - 2 bar		



Kod Code	İletim Hacmi Displacement	Max. Sürekli Basıncı Max. Continuous Pressure	Maks. Aralıklı Basıncı Max. Intermittent Pressure	Maks. Anlık Basıncı Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet
BD	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	(RPM)	(mm)	(mm)	C	C
G20006SF131	6	280	310	325	2200	3000	300	124	90	G1/2"	G1/2"
G20010SF131	10							130	96		
G20016SF131	16							140	96		
G20020SF131	20	260	280	290				146	100	G3/4"	G3/4"
G20025SF131	25	220	250	260				154	102		
G20032SF131	32	190	210	220	2000	2800	165	113			
G20040SF131	40	160	180	190	1800	2500		178	126		