

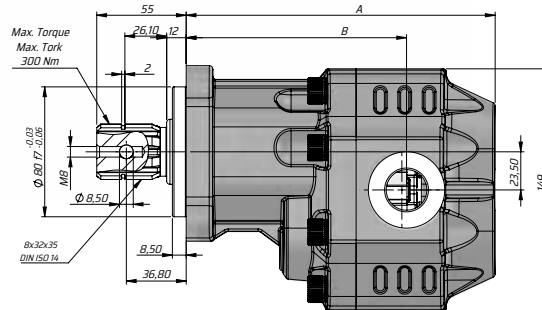


4 DELİKLİ ISO ÇİFT YÖNLÜ DİŞLİ MOTOR


 HİDROLİK SEMBOL
 HYDRAULIC SYMBOL


Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35	> 35
	VG (cSt = mm²/s)	22	32	46	68
Optimale kinematic viscosity		VG= 10 cSt ~ 100 cSt			
Max kinematic viscosity suggested at the start-up		VG= 750 cSt			
Viscosity index suggested	VI > 100	Working temperature -15°C +100°C			
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm			
Inlet pressure		-0,3 - 2 bar			



Kod Code	İletim hacmi Displacement	Maks. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basıncı Max. Intermittent Pressure	Maks. Anlık Basıncı Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet				
BD	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	RPM	(mm)	(mm)	Ç	Ç				
GM300175F131	17	290	315	325	2500	3000	300	173	124.5	G1/2"	G1/2"				
GM300225F131	22							177	126						
GM300275F131	27							179	129.5						
GM300345F131	34	280	300	310	2200	2800		184	130.5	G3/4"	G3/4"				
GM300435F131	43	270	290	300	2000	2500		190	135.5						
GM300515F131	51	240	260	280				195	135.5						
GM300615F131	61	220	240	250	1900	2500		205	142	G1"	G1"				
GM300735F131	73	205	225	230				208	144.5						
GM300825F131	82							214	146						
GM301005F131	100	180	200	220	1500	1800		227	160	G1 1/4"	G1 1/4"				
GM301255F131	125	160	180	200				243	164						