

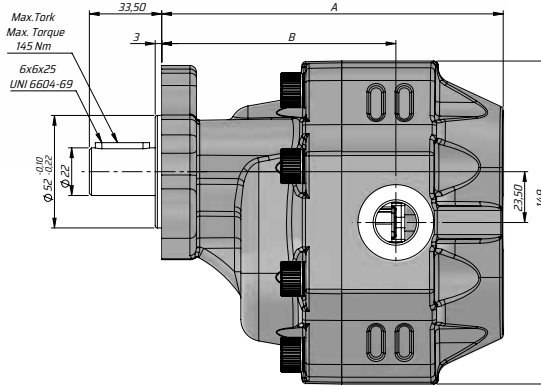


3 DELİKLİ KAMALI UNI ÇİFT YÖNLÜ DİŞLİ MOTOR


 HİDROLİK SEMBOL
 HYDRAULIC SYMBOL


Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon			
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35
	VG (cSt = mm²/s)	22	32	46
Optimale kinematic viscosity		VG= 10 cSt ÷ 100 cSt		
Max kinematic viscosity suggested at the start-up		VG= 750 cSt		
Viscosity index suggested	VI > 100	Working temperature -15°C ÷ +100°C		
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm		
Inlet pressure		-0,3 ÷ 2 bar		

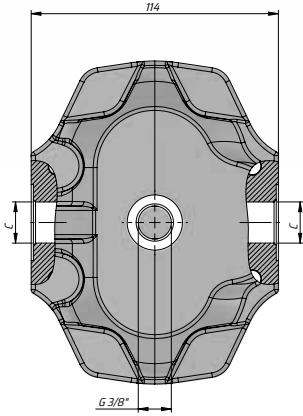

Kod Code	İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basıncı Max. Intermittent Pressure	Maks. Anlık Basıncı Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet	
BD	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	RPM	(mm)	(mm)	C	C	
GM30017UKS31	17	290	315	325	2500	3000	300	151.5	103	G1/2"	G1/2"	
GM30022UKS31	22							155.5	104.5			
GM30027UKS31	27							157.5	108			
GM30034UKS31	34	280	300	310	2200	2800		162.5	109	G3/4"	G3/4"	
GM30043UKS31	43	270	290	300	2000	2500		168.5	114			
GM30051UKS31	51	240	260	280				173.5	114			
GM30061UKS31	61	220	240	250				183.5	120.5	G1"	G1"	
GM300735UKS31	73	205	225	230	1900			186.5	123			
GM30082UKS31	82							192.5	124.5			
GM30100UKS31	100	180	200	220	1500	1800		205.5	138.5	G1 1/4"	G1 1/4"	
GM30125UKS31	125	160	180	200				221.5	142.5			