


4 DELİKLİ KAMALI K ÇİFT YÖNLÜ DİŞLİ MOTOR


 HİDROLİK SEMBOL
 HYDRAULIC SYMBOL


Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35	> 35
	VG (cSt = mm²/s)	22	32	46	68
Optimale kinematic viscosity		VG= 10 cSt - 100 cSt			
Max kinematic viscosity suggested at the start-up		VG= 750 cSt			
Viscosity index suggested	VI > 100	Working temperature -15°C +100°C			
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm			
Inlet pressure		-0,3 - 2 bar			

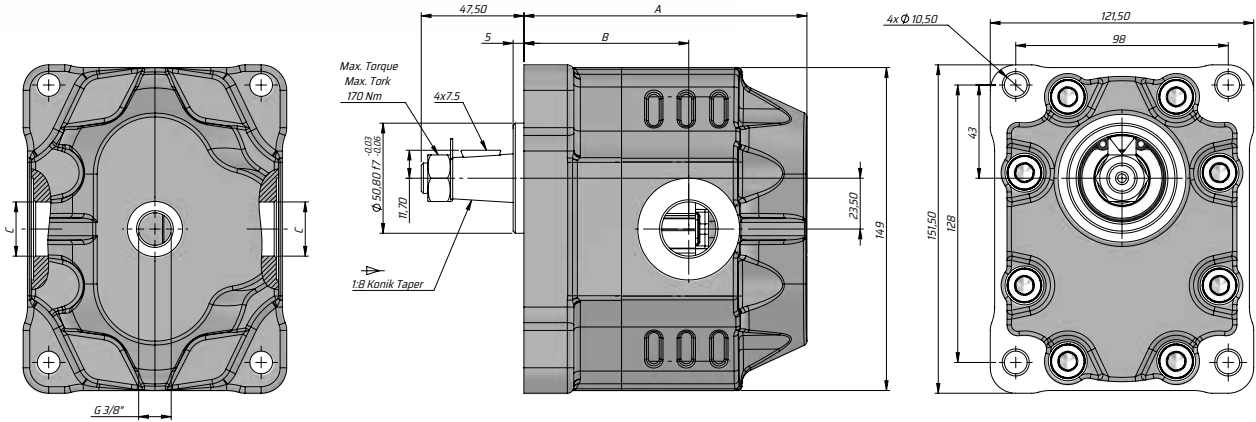

Kod Code	İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Başınç Max. Intermittent Pressure	Maks. Anlık Başınç Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet		
BD	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	(RPM)	(mm)	(mm)	Ç	Ç		
GM30017KK631	17	290	315	325	2500	3000	300	112	65	G1/2"	G1/2"		
GM30022KK631	22							118	70				
GM30027KK631	27							123	71				
GM30034KK631	34	280	300	310	2200	2800		129	76	G3/4"	G3/4"		
GM30043KK631	43	270	290	300	2000	2500		134	76				
GM30051KK631	51	240	260	280				142	82.5				
GM30061KK631	61	220	240	250				154.5	84.50	G1"	G1"		
GM30073KK631	73	205	225	230	1900			153	86.5				
GM30082KK631	82							166	100.5				
GM30100KK631	100	180	200	220	1500	1800		182	104.5	G1 1/4"	G1 1/4"		
GM30125KK631	125	160	180	200				183.5	104.5				