
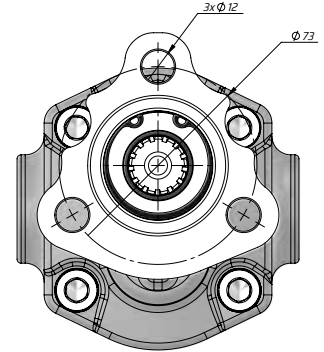
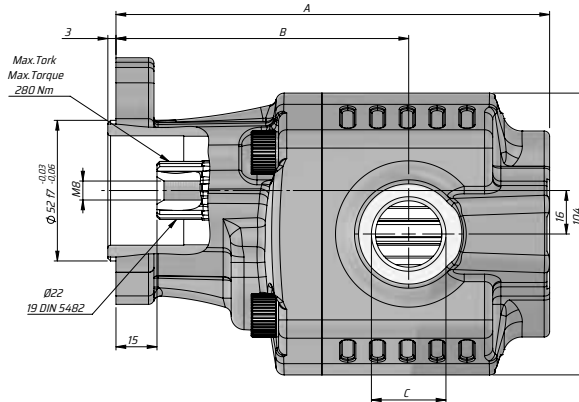


## 3 HOLES UNI BI-DIRECTIONAL GEAR PUMP

## 3 DELİKLİ UNI ÇİFT YÖNLÜ DIŞLI POMPA


 HİDROLİK SEMBOL  
 HYDRAULIC SYMBOL


|                                                   |                                                                                |                     |                                      |              |      |
|---------------------------------------------------|--------------------------------------------------------------------------------|---------------------|--------------------------------------|--------------|------|
| Fluid                                             | Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon |                     |                                      |              |      |
| Kinematic viscosity suggested                     | Average ambient temp. (°C)                                                     | < -10               | -10-10                               | 10-35        | > 35 |
|                                                   | VG (cSt = mm2/s)                                                               | 22                  | 32                                   | 46           | 68   |
| Optimale kinematic viscosity                      |                                                                                |                     | VG= 10 cSt ÷ 100 cSt                 |              |      |
| Max kinematic viscosity suggested at the start-up |                                                                                |                     | VG= 750 cSt                          |              |      |
| Viscosity index suggested                         | VI > 100                                                                       | Working temperature |                                      | -15°C +100°C |      |
| Oil filtering                                     |                                                                                |                     | > 200 bar: 10 µm<br>< 200 bar: 25 µm |              |      |
| Inlet pressure                                    |                                                                                |                     | -0.3 ÷ 2 bar                         |              |      |

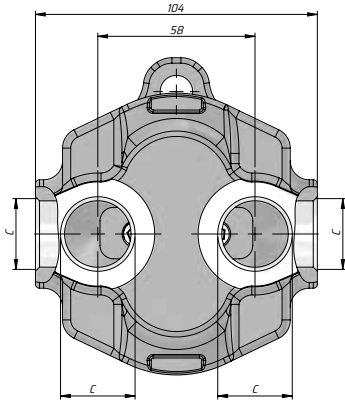

| Kod<br>Code | İletim Hacmi<br>Displacement | Max. Sürekli Basıncı<br>Max. Continuous Pressure | Maks. Aralıklı Basıncı<br>Max. Intermittent Pressure | Maks. Anlık Basıncı<br>Max. Peak Pressure | Maks. Sürekli Hız<br>Max. Continuous Speed | Maks. Aralıklı Hız<br>Max. Intermittent Speed | Min. Hız Min.<br>Speed | A    | B    | Giriş Inlet | Çıkış Outlet |
|-------------|------------------------------|--------------------------------------------------|------------------------------------------------------|-------------------------------------------|--------------------------------------------|-----------------------------------------------|------------------------|------|------|-------------|--------------|
| BD          | (cm <sup>3</sup> /rev)       | (100%)(BAR)                                      | (20 sec.max)(BAR)                                    | (6 sec.max)(BAR)                          | (RPM)                                      | (RPM)                                         | (RPM)                  | (mm) | (mm) | C           | C            |
| G20006UF731 | 6                            | 280                                              | 310                                                  | 325                                       | 2200                                       | 3000                                          | 300                    | 130  | 96   | G1/2"       | G1/2"        |
| G20010UF731 | 10                           |                                                  |                                                      |                                           |                                            |                                               |                        | 136  | 102  |             |              |
| G20014UF731 | 16                           |                                                  |                                                      |                                           |                                            |                                               |                        | 143  | 102  |             |              |
| G20016UF731 | 20                           |                                                  |                                                      |                                           |                                            |                                               |                        | 146  | 102  |             |              |
| G20020UF731 | 25                           | 220                                              | 250                                                  | 260                                       | 2000                                       | 2800                                          | 300                    | 152  | 106  | G3/4"       | G3/4"        |
| G20025UF731 | 32                           | 190                                              | 210                                                  | 220                                       |                                            |                                               |                        | 160  | 108  |             |              |
| G20032UF731 | 40                           | 160                                              | 180                                                  | 190                                       |                                            |                                               |                        | 171  | 119  |             |              |