


4 DELİKLİ ASAE-S ÇİFT YÖNLÜ DİŞLİ MOTOR



HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon			
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35
	VG (cSt = mm²/s)	22	32	46
Optimale kinematic viscosity		VG= 10 cSt ÷ 100 cSt		
Max kinematic viscosity suggested at the start-up		VG= 750 cSt		
Viscosity index suggested	VI > 100	Working temperature -15°C +100°C		
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm		
Inlet pressure		-0,3 ÷ 2 bar		

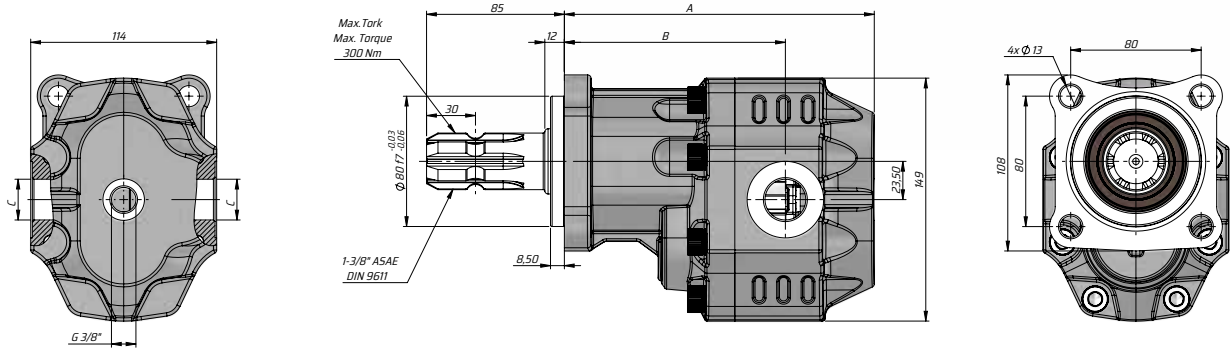

Kod Code	İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basıncı Max. Intermittent Pressure	Maks. Anlık Basıncı Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet	
BD	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	(RPM)	(mm)	(mm)	C	C	
GM30017SF231	17	290	315	325	2500	3000	300	173	124.5	G1/2"	G1/2"	
GM30022SF231	22							177	126			
GM30027SF231	27							179	129.5			
GM30034SF231	34	280	300	310	2200	2800		184	130.5	G3/4"	G3/4"	
GM30043SF231	43	270	290	300	2000	2500		190	135.5			
GM30051SF231	51	240	260	280				195	135.5			
GM30061SF231	61	220	240	250				205	142	G1"	G1"	
GM30073SF231	73	205	225	230	1900			208	144.5			
GM30082SF231	82							214	146			
GM30100SF231	100	180	200	220	1500	1800		227	160	G1 1/4"	G1 1/4"	
GM30125SF231	125	160	180	200				243	164			