


4 DELİKLİ TRC ÇİFT YÖNLÜ DİŞLİ MOTOR



HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35	> 35
	VG (cSt = mm²/s)	22	32	46	68
Optimale kinematic viscosity			VG= 10 cSt + 100 cSt		
Max kinematic viscosity suggested at the start-up			VG= 750 cSt		
Viscosity index suggested	VI > 100	Working temperature		-15°C +100°C	
Oil filtering			> 200 bar: 10 µm < 200 bar: 25 µm		
Inlet pressure			-0,3 + 2 bar		

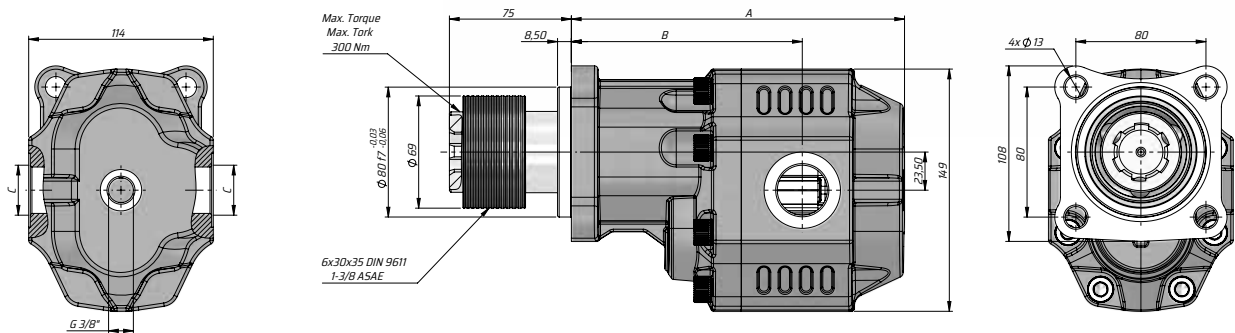

Kod Code	İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Başınç Max. Intermittent Pressure	Maks. Anlık Basınç Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet
BD	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	RPM	(mm)	(mm)	Ç	Ç
GM300175F331	17	290	315	325	2500	3000	300	173	124.5	G1/2"	G1/2"
GM300225F331	22							177	126		
GM300275F331	27							179	129.5		
GM300345F331	34	280	300	310	2200	2800		184	130.5	G3/4"	G3/4"
GM300435F331	43	270	290	300	2000	190		135.5			
GM300515F331	51	240	260	280		195		135.5			
GM300615F331	61	220	240	250	1900	2500		205	142	G1"	G1"
GM300735F331	73	205	225	230				208	144.5		
GM300825F331	82							214	146		
GM301005F331	100	180	200	220	1500	1800		227	160	G1 1/4"	G1 1/4"
GM301255F331	125	160	180	200				243	164		