

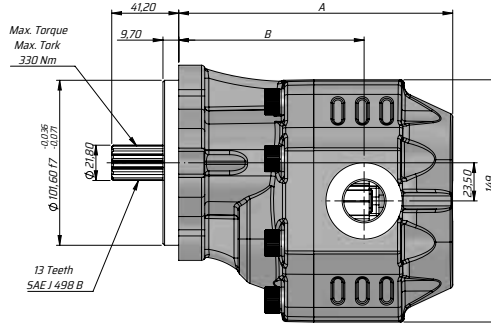


## 2+4 DELİKLİ SAE B 13 DİŞ ÇİFT YÖNLÜ DİŞLİ MOTOR


 HİDROLİK SEMBOL  
 HYDRAULIC SYMBOL


|                                                   |                                                                                |                                      |        |       |
|---------------------------------------------------|--------------------------------------------------------------------------------|--------------------------------------|--------|-------|
| Fluid                                             | Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon |                                      |        |       |
| Kinematic viscosity suggested                     | Average ambient temp. (°C)                                                     | < -10                                | -10-10 | 10-35 |
|                                                   | VG (cSt = mm²/s)                                                               | 22                                   | 32     | 46    |
| Optimale kinematic viscosity                      |                                                                                | VG= 10 cSt ~ 100 cSt                 |        |       |
| Max kinematic viscosity suggested at the start-up |                                                                                | VG= 750 cSt                          |        |       |
| Viscosity index suggested                         | VI > 100                                                                       | Working temperature -15°C +100°C     |        |       |
| Oil filtering                                     |                                                                                | > 200 bar: 10 µm<br>< 200 bar: 25 µm |        |       |
| Inlet pressure                                    |                                                                                | -0,3 - 2 bar                         |        |       |

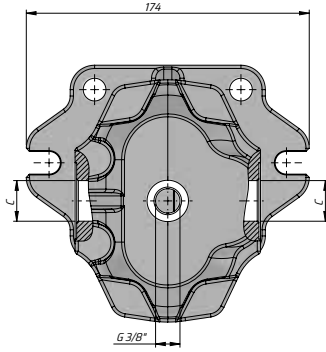

| Kod<br>Code  | İletim hacmi<br>Displacement | Max. Sürekli<br>Basıncı<br>Max. Continuous<br>pressure | Maks. Aralıklı<br>Basıncı<br>Max. Intermittent<br>Pressure | Maks. Anlık Basıncı<br>Max. Peak<br>Pressure | Maks. Sürekli<br>Hız<br>Max. Continuous<br>Speed | Maks. Aralıklı Hız<br>Max. Intermittent<br>Speed | Min.<br>Hız<br>Min.<br>Speed | A     | B     | Giriş<br>Inlet | Çıkış<br>Outlet |
|--------------|------------------------------|--------------------------------------------------------|------------------------------------------------------------|----------------------------------------------|--------------------------------------------------|--------------------------------------------------|------------------------------|-------|-------|----------------|-----------------|
| BD           | (cm³/rev)                    | (100%)(BAR)                                            | (20 sec.max)(BAR)                                          | (6 sec.max)(BAR)                             | (RPM)                                            | (RPM)                                            | (RPM)                        | (mm)  | (mm)  | C              | C               |
| GM30017BF531 | 17                           | 290                                                    | 315                                                        | 325                                          | 2500                                             | 3000                                             | 300                          | 151,5 | 103   | G1/2"          | G1/2"           |
| GM30022BF531 | 22                           |                                                        |                                                            |                                              |                                                  |                                                  |                              | 155,5 | 104,5 |                |                 |
| GM30027BF531 | 27                           |                                                        |                                                            |                                              |                                                  |                                                  |                              | 157,5 | 108   |                |                 |
| GM30034BF531 | 34                           | 280                                                    | 300                                                        | 310                                          | 2200                                             | 2800                                             |                              | 162,5 | 109   | G3/4"          | G3/4"           |
| GM30043BF531 | 43                           | 270                                                    | 290                                                        | 300                                          | 2000                                             | 2500                                             |                              | 168,5 | 114   |                |                 |
| GM30051BF531 | 51                           | 240                                                    | 260                                                        | 280                                          |                                                  |                                                  |                              | 173,5 | 114   |                |                 |
| GM30061BF531 | 61                           | 220                                                    | 240                                                        | 250                                          | 1900                                             | 2500                                             |                              | 183,5 | 120,5 | G1"            | G1"             |
| GM30073BF531 | 73                           | 205                                                    | 225                                                        | 230                                          |                                                  |                                                  |                              | 186,5 | 123   |                |                 |
| GM30082BF531 | 82                           |                                                        |                                                            |                                              |                                                  |                                                  |                              | 192,5 | 124,5 |                |                 |
| GM30100BF531 | 100                          | 180                                                    | 200                                                        | 220                                          | 1500                                             | 1800                                             |                              | 205,5 | 138,5 | G1 1/4"        | G1 1/4"         |
| GM30125BF531 | 125                          | 160                                                    | 180                                                        | 200                                          |                                                  |                                                  |                              | 221,5 | 142,5 |                |                 |