




2+4 DELİKLİ SAE B KAMALI ÇİFT YÖNLÜ DİŞLİ MOTOR

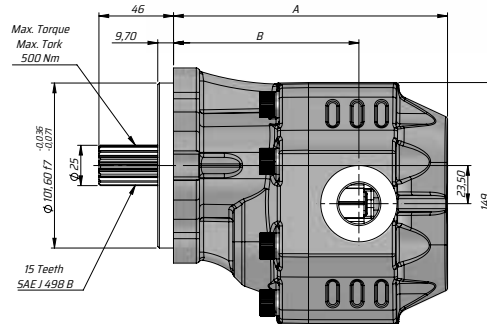

HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon			
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10~10	10~35
	VG (cSt = mm²/s)	22	32	46
Optimale kinematic viscosity		VG= 10 cSt ÷ 100 cSt		
Max kinematic viscosity suggested at the start-up		VG= 750 cSt		
Viscosity index suggested	VI > 100	Working temperature -15°C +100°C		
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm		
Inlet pressure		-0,3 ÷ 2 bar		

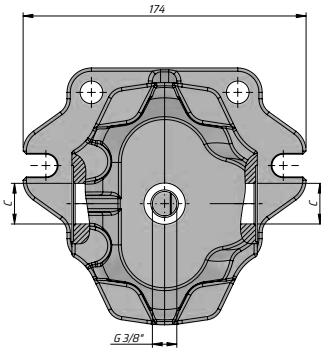

Kod Code	İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basıncı Max. Intermittent Pressure	Maks. Anlık Basıncı Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet
BD	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	(RPM)	(mm)	(mm)	C	C
GM30017BF631	17	290	315	325	2500	3000	300	151,5	103	G1/2"	G1/2"
GM30022BF631	22							155,5	104,5		
GM30027BF631	27							157,5	108		
GM30034BF631	34	280	300	310	2200	2800		162,5	109	G3/4"	G3/4"
GM30043BF631	43	270	290	300	2000	2500		168,5	114		
GM30051BF631	51	240	260	280				173,5	114		
GM30061BF631	61	220	240	250	1900	2500		183,5	120,5	G1"	G1"
GM30073BF631	73	205	225	230				186,5	123		
GM30082BF631	82							192,5	124,5		
GM30100BF631	100	180	200	220	1500	1800		205,5	138,5	G1 1/4"	G1 1/4"
GM30125BF631	125	160	180	200				221,5	142,5		