


4 DELİKLİ ISO ÇİFT YÖNLÜ DİŞLİ MOTOR


 HİDROLİK SEMBOL
 HYDRAULIC SYMBOL


Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35	> 35
	VG (cSt = mm²/s)	22	32	46	68
Optimale kinematic viscosity		VG= 10 cSt ~ 100 cSt			
Max kinematic viscosity suggested at the start-up		VG= 750 cSt			
Viscosity index suggested	VI > 100	Working temperature -15°C +100°C			
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm			
Inlet pressure		-0.3 ~ 2 bar			

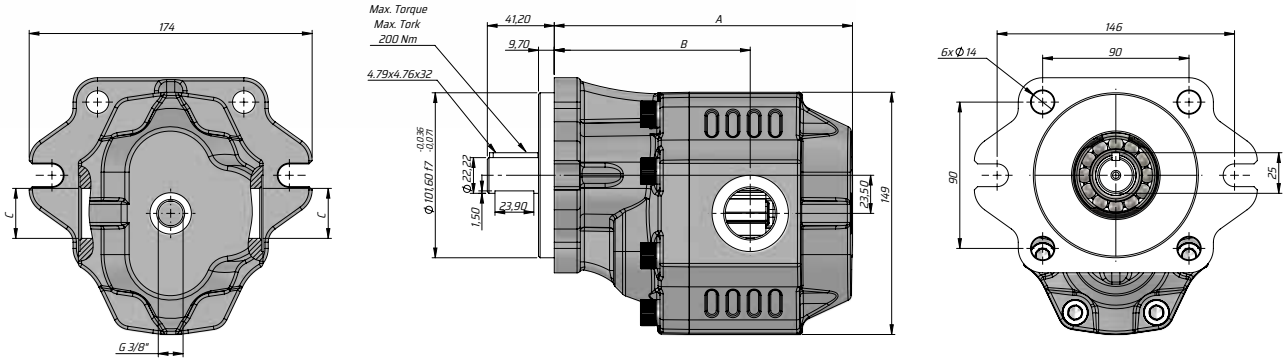

Kod Code	İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Başınç Max. Intermittent Pressure	Maks. Anlık Başınç Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet
BD	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	(RPM)	(mm)	(mm)	Ç	Ç
GM30017BK231	17	290	315	325	2500	3000	300	151.5	103	G1/2"	G1/2"
GM30022BK231	22							155.5	104.5		
GM30027BK231	27							157.5	108		
GM30034BK231	34	280	300	310	2200	2800		162.5	109	G3/4"	G3/4"
GM30043BK231	43	270	290	300	2000	2500		168.5	114		
GM30051BK231	51	240	260	280				173.5	114		
GM30061BK231	61	220	240	250	1900	2500		183.5	120.5	G1"	G1"
GM30073BK231	73	205	225	230				186.5	123		
GM30082BK231	82							192.5	124.5		
GM30100BK231	100	180	200	220	1500	1800	300	205.5	138.5	G1 1/4"	G1 1/4"
GM30125BK231	125	160	180	200				221.5	142.5		