


2+4 DELİKLİ SAE B KAMALI ÇİFT YÖNLÜ DİŞLİ MOTOR



HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35	> 35
	VG (cSt = mm²/s)	22	32	46	68
Optimale kinematic viscosity			VG= 10 cSt - 100 cSt		
Max kinematic viscosity suggested at the start-up			VG= 750 cSt		
Viscosity index suggested	VI > 100		Working temperature -15°C +100°C		
Oil filtering			> 200 bar: 10 µm < 200 bar: 25 µm		
Inlet pressure			-0,3 - 2 bar		

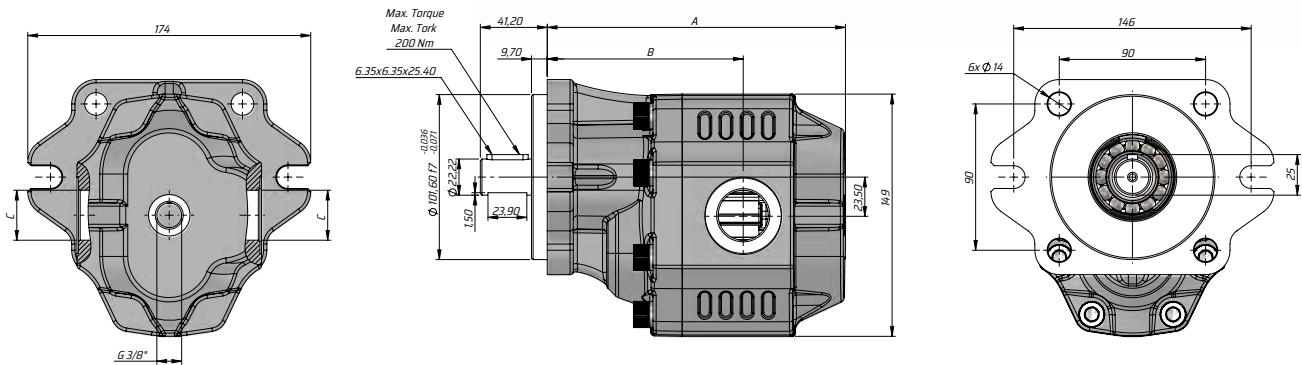

Kod Code	İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basınç Max. Intermittent Pressure	Maks. Anlık Basınç Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet
BD	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	(RPM)	(mm)	(mm)	Ç	Ç
GM30017BK131	17	290	315	325	2500	3000	300	151.5	103	G1/2"	G1/2"
GM30022BK131	22							155.5	104.5		
GM30027BK131	27							157.5	108		
GM30034BK131	34	280	300	310	2200	2800		162.5	109	G3/4"	G3/4"
GM30043BK131	43	270	290	300	2000	2500		168.5	114		
GM30051BK131	51	240	260	280				173.5	114		
GM30061BK131	61	220	240	250	1900	2500		183.5	120.5	G1"	G1"
GM30073BK131	73	205	225	230				186.5	123		
GM30082BK131	82							192.5	124.5		
GM30100BK131	100	180	200	220	1500	1800		205.5	138.5	G1 1/4"	G1 1/4"
GM30125BK131	125	160	180	200				221.5	142.5		