

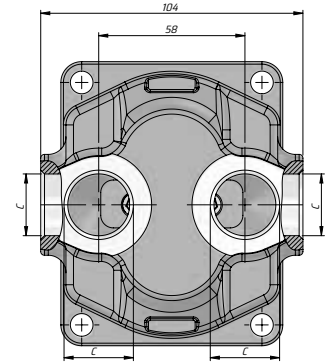


4 DELİKLİ K KAMALI ÇİFT YÖNLÜ DİŞLİ POMPA

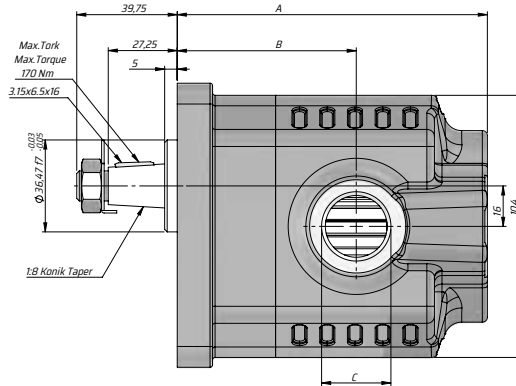

HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon			
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10~10	10~35
	VG (cSt = mm ² /s)	22	32	46
Optimale kinematic viscosity		VG= 10 cSt ÷ 100 cSt		
Max kinematic viscosity suggested at the start-up		VG= 750 cSt		
Viscosity index suggested	VI > 100	Working temperature -15°C ÷ 100°C		
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm		
Inlet pressure		-0,3 ÷ 2 bar		

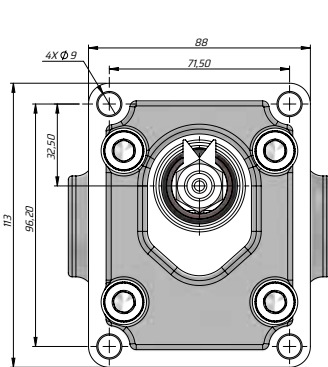

Kod Code	İletim Hacmi Displacement	Max. Sürekli Basıncı Max. Continuous Pressure	Hız Aralığı Speed Range		A	B	Giriş Inlet	Çıkış Outlet
			(Hour/Minute)-(Rev / Minute)					
BD	(cm³/rev)	(BAR)	Min. Continuous Min. Sürekli	Max. Continuous Maks. Sürekli	(mm)	(mm)	Ç	Ç
G20006KK631	6	280	300	2300	93	59	G1/2"	G1/2"
G20010KK631	10				99	65		
G20016KK631	16				109	65		
G20020KK631	20	260			115	69		
G20025KK631	25	220		123	71	G3/4"	G3/4"	
G20032KK631	32	190		2100	134			82
G20040KK631	40	180		1900	147			95