


4 DELİKLİ KAMALI K ÇİFT YÖNLÜ DİŞLİ MOTOR



HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10~10	10~35	> 35
	VG (cSt = mm²/s)	22	32	46	68
Optimale kinematic viscosity		VG= 10 cSt ~ 100 cSt			
Max kinematic viscosity suggested at the start-up		VG= 750 cSt			
Viscosity index suggested	VI > 100	Working temperature -15°C ~ 100°C			
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm			
Inlet pressure		-0,3 ~ 2 bar			

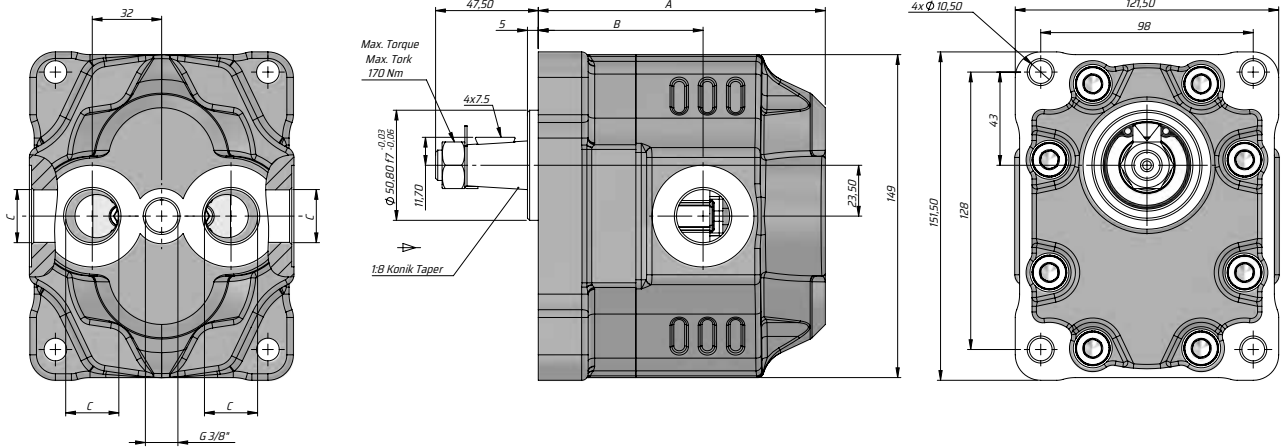

Kod Code	İletim hacmi Displacement	Maks. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basıncı Max. Intermittent Pressure	Maks. Anlık Basıncı Max. Peak Pressure	Maks. Sürekli Hız Max. Continu- ous Speed	Maks. Aralıklı Hız Max.Intermit- tent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet
BD	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	(RPM)	(mm)	(mm)	Ç	Ç
GM30034KK635	34	240	250	260	2200	2800	300	126,5	71	G3/4"	G1"
GM30043KK635	43	230	240	250	2000	2500		132,5	76		
GM30051KK635	51	220	230	240				137,5	76		
GM30061KK635	61	205	225	230	1900	2500		145,5	82,5		
GM30073KK635	73	170	180	190	1500	1800		150,5	84,5		
GM30082KK635	82	205	225	230	1900	2500		156,5	86,5		