

4 HOLES TRC BI-DIRECTIONAL GEAR MOTOR




4 DELİKLİ TRC ÇİFT YÖNLÜ DİŞLİ MOTOR



HİDROLİK SEMBOL
HYDRAULIC SYMBOL



Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, PPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35	> 35
	VG (cSt = mm2/s)	22	32	46	68
Optimale kinematic viscosity			VG= 10 cSt ÷ 100 cSt		
Max kinematic viscosity suggested at the start-up			VG= 750 cSt		
Viscosity index suggested	VI > 100		Working temperature -15°C -100°C		
Oil filtering			> 200 bar: 10 µm < 200 bar: 25 µm		
Inlet pressure			-0.3 ÷ 2 bar		

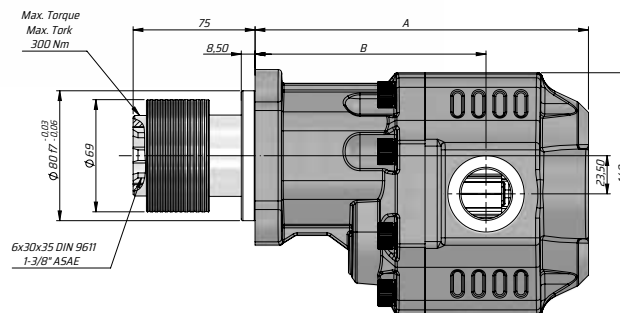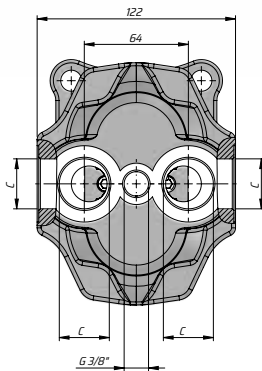

Kod Code	İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basınç Max. Intermittent Pressure	Maks. Anlık Basınç Max. Peak Pressure	Maks. Sürekli Hız Max. Continu- ous Speed	Maks. Aralıklı Hız Max.Intermit- tent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet
BD	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	(RPM)	(mm)	(mm)	Ç	Ç
GM300345F335	34	240	250	260	2200	2800	300	186	130.5	G3/4"	
GM300435F335	43	230	240	250	2000	2500		192	135.5		
GM300515F335	51	220	230	240				197	135.5		
GM300615F335	61	205	225	230	1900	2500		205	142	G1"	
GM300735F335	73	170	180	190	1500	1800		210	144		
GM300825F335	82	205	225	230	1900	2500		216	146		