

2+4 HOLES SAE B 15 TEETH BI-DIRECTIONAL GEAR MOTOR




2+4 DELİKLİ SAE B 15 DİŞ ÇİFT YÖNLÜ DİŞLİ MOTOR



HİDROLİK SEMBOL
HYDRAULIC SYMBOL



Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, PPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35	> 35
	VG (cSt = mm²/s)	22	32	46	68
Optimale kinematic viscosity			VG= 10 cSt ÷ 100 cSt		
Max kinematic viscosity suggested at the start-up			VG= 750 cSt		
Viscosity index suggested	VI > 100		Working temperature -15°C -100°C		
Oil filtering			> 200 bar: 10 µm < 200 bar: 25 µm		
Inlet pressure			-0.3 ÷ 2 bar		

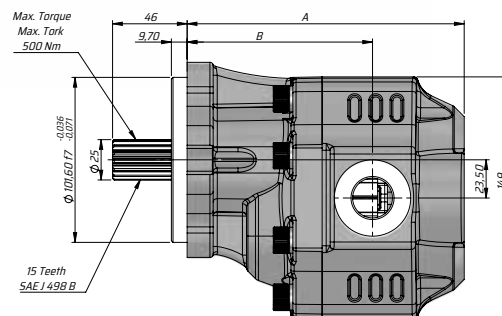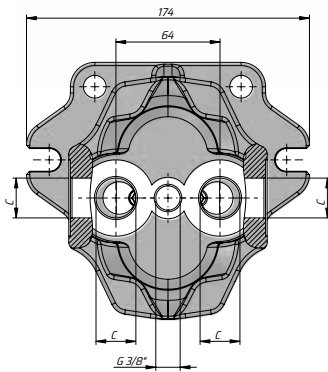

Kod Code	İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Başıncı Max. Intermittent Pressure	Maks. Anlık Başıncı Max. Peak Pressure	Maks. Sürekli Hız Max. Continu- ous Speed	Maks. Aralıklı Hız Max.Intermit- tent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet
BD	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	(RPM)	(mm)	(mm)	C	C
GM30034BF635	34	240	250	260	2200	2800	300	164.5	109	G3/4"	
GM30043BF635	43	230	240	250	2000	2500		170.5	114		
GM30051BF635	51	220	230	240				175.5	114		
GM30061BF635	61	205	225	230	1900	2500		183.5	120.5	G1"	
GM30073BF635	73	170	180	190	1500	1800		188.5	122.5		
GM30082BF635	82	205	225	230	1900	2500		194.5	126		