




4 DELİKLİ KISA VERİYON ISO DİŞLİ POMPA

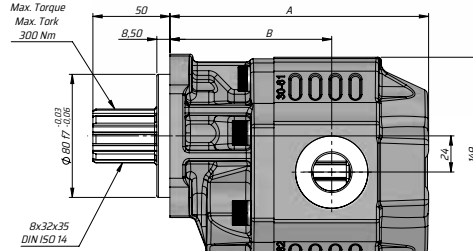

HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10~10	10~35	> 35
	VG (cSt = mm²/s)	22	32	46	68
Optimale kinematic viscosity		VG= 10 cSt ÷ 100 cSt			
Max kinematic viscosity suggested at the start-up		VG= 750 cSt			
Viscosity index suggested	VI > 100	Working temperature -15°C ÷ 100°C			
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm			
Inlet pressure		-0,3 ÷ 2 bar			



Kod Code		İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basıncı Max. Intermittent Pressure	Maks. Anlık Basıncı Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet	
Sol/Left	Sağ/Right	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	RPM	(mm)	(mm)	C	D	
G300175SF111	G300175SF121	17	290	315	325	2500	3000	300	136	87.5	G1/2"	G1/2"	
G300225SF111	G300225SF121	22							140	89.5	G3/4"		
G300275SF111	G300275SF121	27							142	92.5			
G300345SF111	G300345SF121	34	280	300	310	2200	2800		147	93.5	G1"	G3/4"	
G300435SF111	G300435SF121	43	270	290	300	2000	153		98.5				
G300515SF111	G300515SF121	51	240	260	280		158		98.5				
G300615SF111	G300615SF121	61	220	240	250	1900	2500		166	105	G1 1/4"	G1"	
G300735SF111	G300735SF121	73	205	225	230				177	107			
G300825SF111	G300825SF121	82							177	109			
G301005SF111	G301005SF121	10	180	200	220	1500			1800	190	123	G1 1/4"	G1" G3/4" (Alternative)
G301255SF111	G301255SF121	12	160	180	200					206	127		