





4 DELİKLİ KAMALI K ADAPTÖRLÜ DİŞLİ POMPA

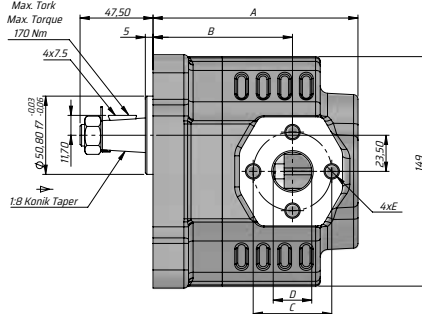

HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10~10	10~35	> 35
	VG (cSt = mm ² /s)	22	32	46	68
Optimale kinematic viscosity		VG= 10 cSt ~ 100 cSt			
Max kinematic viscosity suggested at the start-up		VG= 750 cSt			
Viscosity index suggested	VI > 100	Working temperature -15°C ~100°C			
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm			
Inlet pressure		-0,3 ~ 2 bar			



Kod Code			İletim hacmi Displacement	Maks. Aralıklı Başınç Max. Intermittent Pressure	Hız Aralığı Speed Range		A	B	Sol/Left - Sağ/Right								BD					
					(Dev/Dak) (Rev / Min)	(Dev/Dak) (Rev / Min)			GİRİŞ Inlet				ÇIKIŞ Outlet				GİRİŞ Inlet			ÇIKIŞ Outlet		
Sol/Left	Sağ/Right	BD	(cm³/rev)	(BAR)	Min.	Max. Continuous	(mm)	(mm)	C	D	E	F	G	H	C	D	E	F	G	H		
G30022KK612	G30022KK622	G30022KK632	22	300	300	2500	154	118,50	51	25	M10	40	19	M8	51	25	M10	51	25	M10		
G30027KK612	G30027KK622	G30027KK632	27	290			160	118,50														
G30034KK612	G30034KK622	G30034KK632	34	285			2200	165													122,50	
G30043KK612	G30043KK622	G30043KK632	43	280			2000	171													128,50	
G30051KK612	G30051KK622	G30051KK632	51	230			176	125,50														
G30061KK612	G30061KK622	G30061KK632	61	225			1800	184													132,50	
G30082KK612	G30082KK622	G30082KK632	82	200			1500	195													140,50	62