


4 DELİKLİ KAMALI K TANDEM DİŞLİ POMPA



HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon			
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35
	VG (cSt = mm²/s)	22	32	46
Optimale kinematic viscosity		VG= 10 cSt ÷ 100 cSt		
Max kinematic viscosity suggested at the start-up		VG= 750 cSt		
Viscosity index suggested	VI > 100	Working temperature -15°C +100°C		
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm		
Inlet pressure		-0,3 ÷ 2 bar		

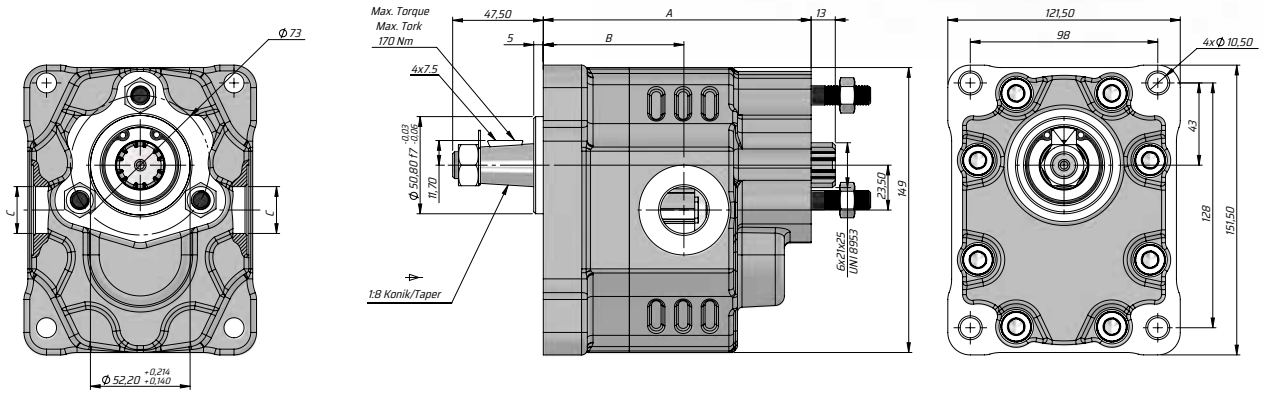

Kod Code	İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basıncı Max. Intermittent Pressure	Maks. Anlık Basıncı Max. Peak Pressure	Maks. Sürekli Hız Max. Continu- ous Speed	Maks. Aralıklı Hız Max. Intermit- tent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet
BD	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	(RPM)	(mm)	(mm)	Ç	Ç
GT30017KK631	17	290	315	325	2500	3000	300	123	64	G1/2"	G1/2"
GT30022KK631	22							127	67		
GT30027KK631	27							129	67		
GT30034KK631	34	280	300	310	2200	2800		134	69	G3/4"	G3/4"
GT30036KK631	36							134	69		
GT30038KK631	38							136	69		
GT30043KK631	43	270	290	300	2000	2500		140	73,5	G1"	G1"
GT30051KK631	51	240	260	280				145	75		
GT30061KK631	61	220	240	250	1800	2000		153	79		
GT30073KK631	73	200	220	230	1600	1800		158	81,5		
GT30082KK631	82	190	210	220				164	86,5		
GT30100KK631	100	180	200	220	1500	1800		177	100,5	G1 1/4"	G1 1/4"
GT30125KK631	125	160	180	200				193	104,5		