




4 DELİKLİ ASAE-S TANDEM DİŞLİ POMPA

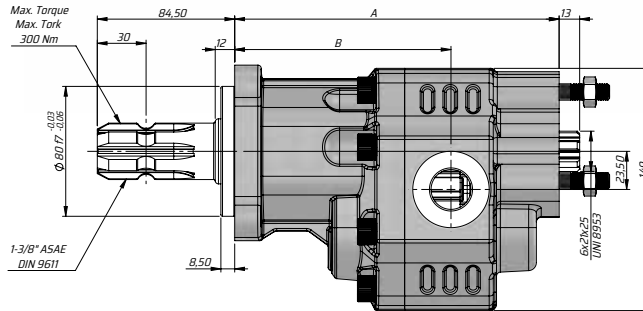

HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon			
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35
	VG (cSt = mm²/s)	22	32	46
Optimale kinematic viscosity		VG= 10 cSt ÷ 100 cSt		
Max kinematic viscosity suggested at the start-up		VG= 750 cSt		
Viscosity index suggested	VI > 100	Working temperature -15°C ÷ 100°C		
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm		
Inlet pressure		-0,3 ÷ 2 bar		



Kod Code	İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basıncı Max. Intermittent Pressure	Maks. Anlık Basıncı Max. Peak Pressure	Maks. Sürekli Hız Max. Continu- ous Speed	Maks. Aralıklı Hız Max.Intermit- tent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet
BD	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	(RPM)	(mm)	(mm)	C	C
GT30017SF231	17	290	315	325	2500	3000	300	182,5	123,5	G1/2"	G1/2"
GT30022SF231	22							186,5	126,5		
GT30027SF231	27							188,5	126,5		
GT30034SF231	34	280	300	310	2200	2800		193,5	128,5	G3/4"	G3/4"
GT30036SF231	36							193,5	128,5		
GT30038SF231	38							193,5	128,5		
GT30043SF231	43	270	290	300	2000	2500		199,5	133	G1"	G1"
GT30051SF231	51	240	260	280				204,5	134,5		
GT30061SF231	61	220	240	250	1800	2000		212,5	138,5		
GT30073SF231	73	200	220	230	1500	1800		217,5	141		
GT30082SF231	82	190	210	220				223,5	146		
GT30100SF231	100	180	200	220				236,5	160		
GT30125SF231	125	160	180	200				252,5	164		