
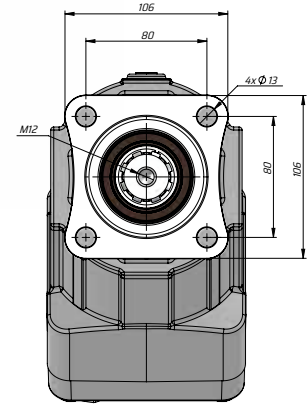
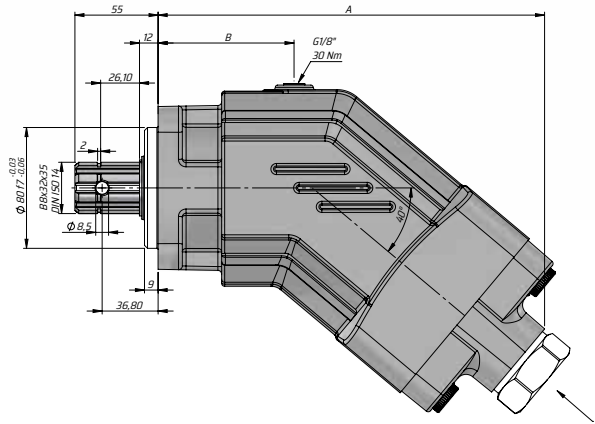


HİDROLİK SEMBOL
HYDRAULIC SYMBOL

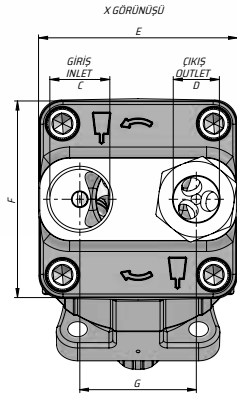

Kod Code	İletim Hacmi Displacement	Maks. Sürekli Basiş Max. Continuous Pressure	Maks. Anlık Basiş Max. Peak pressure	Maks. Hız Max. speed (RPM)		A	B	C	D	E	F	G
	(Cm³/rev)			nom	max							
APA235F111 APA235F121	23	350	400	3050	4300	180	58	G3/4"	G1/2"	89	89	52
APA325F111 APA325F121	32			2750	3900					89	89	52
APA455F111 APA455F121	45			2650	3800	210	78	G1"	G3/4"	108,7	108,7	59
APA565F111 APA565F121	56			2550	3700	218	80			110,5	108	64
APA635F111 APA635F121	63			2200	3200					110,5	108	64
APA805F111 APA805F121	80			2150	3100	245	94	G1 1/4"	G1"	127	118	69
APA905F111 APA905F121	90									131,6	130	77
APA1075F111 APA1075F121	107									2000	2800	131,6
APA1255F111 APA1255F121	125	300	350	1750	2500	255				131,6	130	77

Tapaların Sıkma Torku Tightening Torque Of The Plugs	
G1/2"	55-65Nm
G3/4"	90-100Nm
G1"	135-160Nm
G1 1/4"	200-230Nm

*(1) - Left- Sol (2) - Right- Sağ